

TOUCH TRACKER® 16 Dome Controller



Features

- Controls up to 16 video inputs
- Compatible with SensorNet domes (SpeedDome® Ultra and SpeedDome Optima series)
- Controls pan/tilt/zoom functions
- Up to 96 programmable Presets per dome
- Three programmable Patterns per dome
- One programmable Sequence
- Up to four simultaneous dome input alarms
- Supports multiple languages
- System diagnostics
- LCD display
- Integrated multiplexer control
- Easily interfaces with the Intellex® Digital Video Management System for dome control

The ADTT16E Advanced Dome Controller, ergonomically designed for ease of operation, is the perfect controller for any small surveillance application. This programmable video controller allows you to control up to 16 SensorNet series programmable domes, including both indoor and outdoor versions of SpeedDome® Ultra and SpeedDome Optima. The controller's Tracker Ball provides pan/tilt control of the currently-selected dome.

To provide for video switching, the ADTT16E seamlessly integrates with the Intellex Digital Video Management System, as well as the Sensormatic series of quads and multiplexers that are fitted with RS-232 communications ports.

Standard features include up to 96 Presets and three Patterns per dome. The ADTT16E can be used as a standalone unit for control of a single video input or several inputs on dedicated monitors. When used in conjunction with a compatible quad, multiplexer, or Intellex, the controller can define and display a sequence of up to 16 video inputs on a single monitor. The inputs can also be displayed in multi-screen format.

The system can manage up to four simultaneous dome alarm inputs; this ensures that all alarm events are recognized, even if more than one alarm occurs simultaneously.

The ADTT16E supports 10 languages and easily integrates with Intellex for dome control with the digital video management system.



The Versatile ADTT16E Controller Provides You With A Host Of Programmable Features

SPECIFICATIONS

Model Numbers

The ADTT16E is suitable for use worldwide. Proper low-voltage transformer, with mains power cord, is specified at time of order (120 or 230 VAC, and country of installation).

Electrical

Input Voltage 16 to 32 VAC, 50/60 Hz
 Power Consumption 10.8 watts

Mechanical

Dimensions (H x W x D) 130 x 194 x 260 mm
 (5.12 x 7.63 x 10.24 in)
 Weight 1.0 kg (2.2 lbs)
 Color Black shell with gray appliqué

Environmental

Operating Temperature 0° to 50° C (32° to 122° F)
 Humidity 95% RH (non-condensing)
 Storage Temperature -20° to 65° C (-4° to 149° F)

Regulatory

Emissions FCC: 47 CFR Part 15,
 Subpart B, Class A
 CE: EN55022 Class B
 Immunity CE: EN50082-1
 EN50130-4 1995, A1 1998
 Safety UL1950
 CSA 22.2 No. 205
 CSA 22.2 No. 950
 CE: EN60950

Dome Compatibility

SpeedDome Optima series programmable domes
 SpeedDome Ultra series programmable domes
 SpeedDome series programmable domes
 SpeedDome LT programmable domes

J-Box Compatibility

ADTT16E is compatible with all versions of indoor and outdoor
 SensorNet J-Boxes.

Quad Compatibility

ADTT16E is compatible with Sensormatic quads.


Multiplexer Compatibility

ADTT16E is compatible with Sensormatic simplex and
 duplex multiplexers.

Intellex Compatibility

ADTT16E is compatible with the Intellex Digital Video Management System.

Product specifications and availability subject
 to change without notice.
 Certain product names mentioned herein may be trade names
 and/or registered trademarks of other companies.

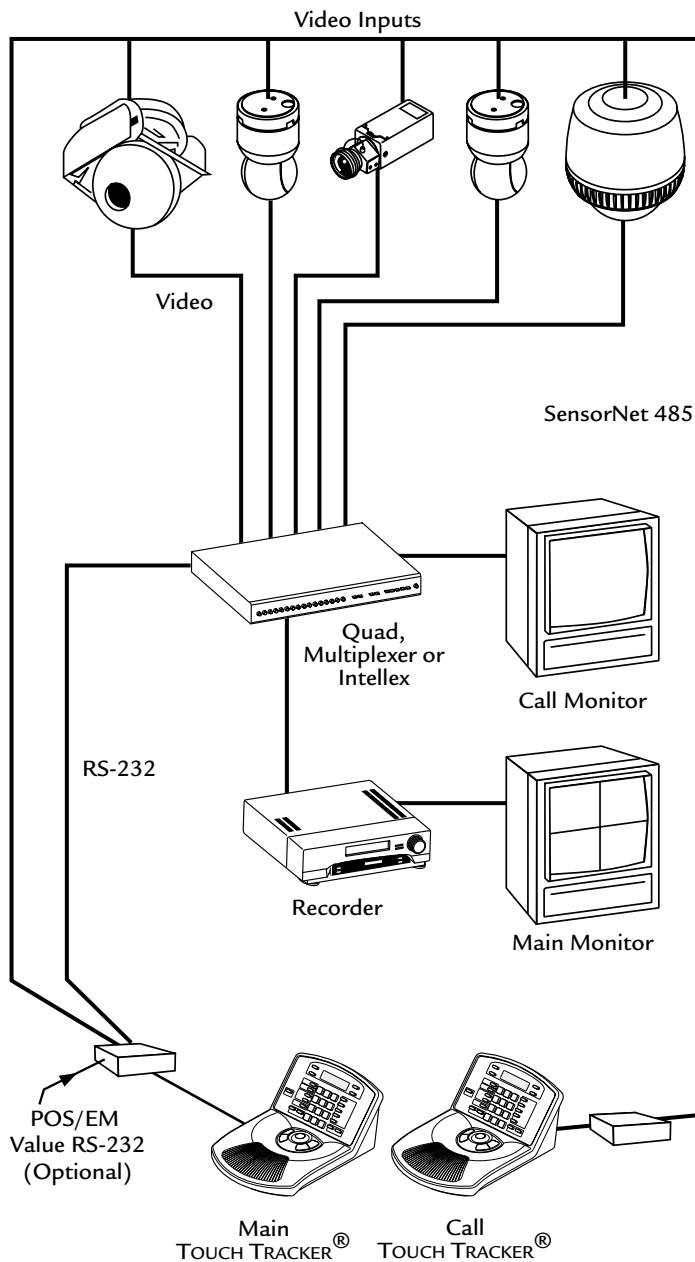

Typical System Connections
 (when the Call TOUCH TRACKER is not
 located in close proximity to the
 Main TOUCH TRACKER)

Sensormatic Electronics Corporation
 6600 Congress Avenue, Boca Raton, Florida, 33487, U.S.A.
 Telephone: 561.912.6000 Toll Free: 800.862.7515

CE
 VSD087-01-C 02/02 L
 ©2002 Sensormatic Electronics Corporation