
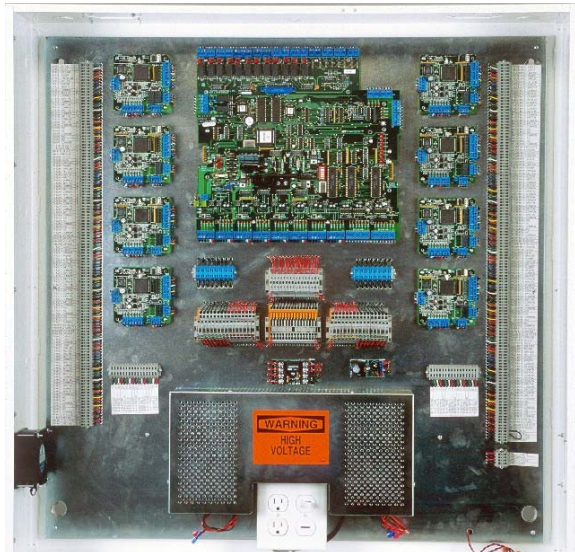


*Custom Access Control Enclosure for one GRCNX8/16 and 8 GRINXs
(GENCLRCNX)*

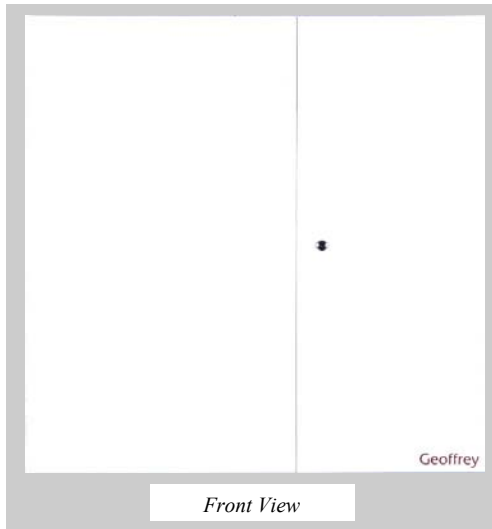


Interior View

Features:

- Pre-wired and pre-tested enclosures with on-board power supplies have clearly marked quick connectors that drastically reduce setup times
- Design allows for easy replacement of all components
- Plug and use design that powers and supports all lock mechanisms, reader heads, contact inputs, PIR motion detectors and local annunciators[£]
- Meets the rigorous requirements of nationwide installation and service
- Significantly reduces manpower requirements during installation and decreases disruption in client's daily business
- Makes service and maintenance easy because the enclosure gives consistency to every site and reduces the training curve for personnel
- Clearly marked components within the enclosure allow a service technician to enter any site and immediately be very familiar with the equipment even if it is a first visit
- All fail secure locks will stay functional after fire panel cuts power to all fail safe locks
- Fuse block indicator alerts when fuse is blown
- Enclosure Dimensions:
32" x 32" x 8"
- Expansion enclosures connected by four 8-conductors and one 2-conductor
- All Mounting Hardware Provided
- Requires one 115VAC 20-amp dedicated line; one 7-amp hour battery and four 5-amp hour batteries (included)
- Enclosure provides two 12 volt outputs

Reader Controller Custom Enclosure (GENCL-RCNX)

- Houses and supports one Geoffrey Reader Controller (GRCNX8 or 16) and eight Geoffrey Reader Interfaces (GRINX) (sold separately)
- Pre-tested and Pre-wired 16VDC, 100VA transformer with 4.0 or 8.0 amp power supply and all Internal Communication Harnesses
- Harness includes: 24V fire drop-out relay & snap on/off board replacement; pre-wired field connectors supports reader head, door locks, contact inputs, local annunciators and PIRs
- Protection & Fusing: provides individual one-amp fusing - supports reader head, door locks, contacts, local annunciators and PIRs (Request to Exit device)
- **GENCLRCNX** includes door strike/magnetic lock power supply

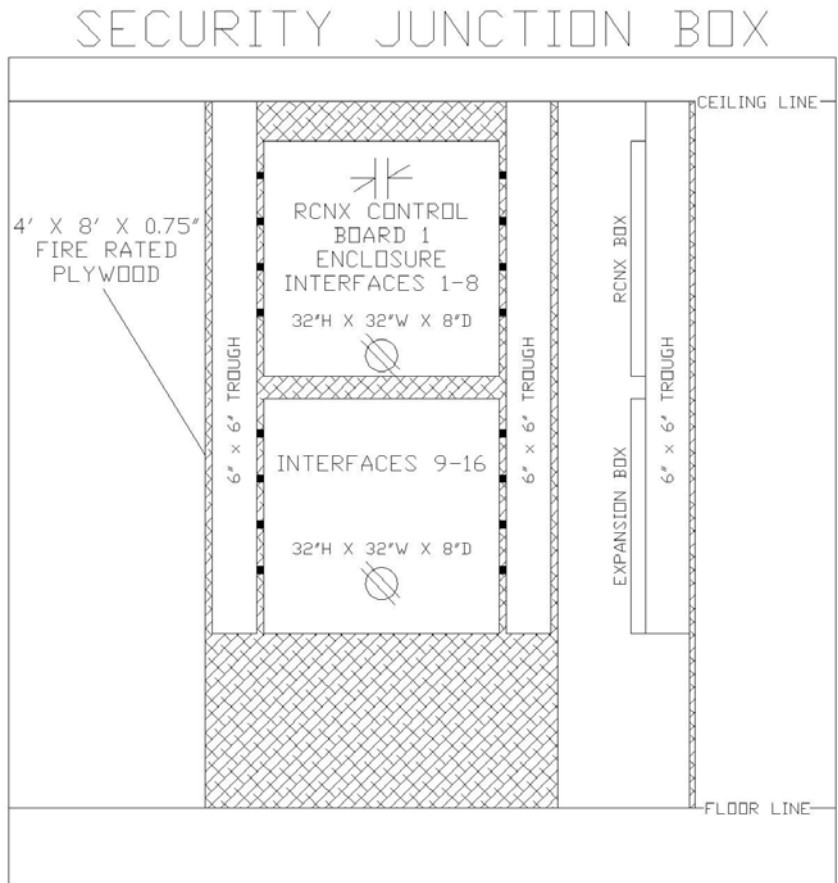

IR Security & Safety Solutions

2 Cranberry Road
P.O. Box 5907
Parsippany, NJ 07054
Tel: 973.299.1300
Toll Free: 800.604.3633
Fax: 973.299.9799
E-mail: sales@geoffreyaccess.com
Web: www.geoffreyaccess.com