


# Accel Stand-Alone DVR System

## KEY FEATURES


4 Channel Video / 4 Channel Audio  
 Real-time Operating System  
 4 Channel Real-Time Simultaneous recording  
 MPEG2 Compression  
 Remote monitoring / search / control via network (LAN)  
 Search: Camera, date, time  
 Setup: Initial screen division, fast search, user level password protection  
 Surveillance: Motion Detection, Sensor input  
 Email Remote Notification  
 Backup to CD-R/W  
 IR Remote Control



Main Screen

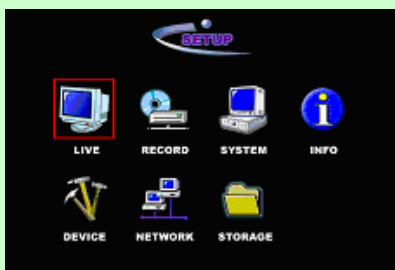

Setup Screen

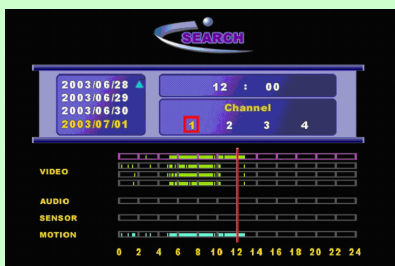

Playback Screen

## SIRIUS S304



## SPECIFICATION

VIDEO	Input	4 Composite BNC (1 Volt p. p.)
	Loop Out	4 Composite BNC (1 Volt p. p.)
DISPLAY	Speed	30 fps per channel, 120 fps total
	Split Screen	1, 4
VIDEO RECORDING	Speed	30 fps per channel max, 120 fps total
	Resolution	360 x 240, 720x480 pixels
	Compression	MPEG2
	Image Size	~ 4 Kbytes
	Mode	Manual, Motion Detection and Sensor
PLAYBACK	Display	270 fps max.
	Search Mode	Date, Time, Channel, Event
AUDIO	Input	4 Line In (RCA)
	Output	1 Line Out (RCA)
MONITOR	Output	1 S-Video
		1 BNC
SENSOR / CONTROL	Sensor Input	4 points (NO/NC Selectable) (12 Volt)
	Relay Output	2 points (NO/NC Selectable)
	Pan/Tilt/Zoom	4 channel
NETWORK	Transmission Speed	Real-Time
	Remote View	Remote Access Software
	Protocol	TCP/IP
BUILT-IN DEVICE	Storage	120 or 250 GB
	Backup	CD-R/W
	PTZ Control	RS-485
OTHERS	Dimensions	15 in x 12 in x 3.5 in (W x L x H)
	O/S	RTOS
	Power Source	110 ~ 240 VAC, 50/60 Hz
	Warranty	3 Years



**Accel Security, Inc.**  
 2392 East Artesia Blvd., Long Beach, CA 90805  
 Tel: 562.423.2600 Fax: 562.423.2620  
<http://www.AccelSecurity.com>