

32cm(13") B/W Video Monitor WV-BM1410




- Actual visual size: 32cm(13") diagonal
- 1,000 lines resolution at center.
- DC restoration.
- Short H. AFC time constant for VCR playback.
- Can be mounted into a standard 19-type rack with optional adaptor WV-Q21W.

WV-Q21W (optional)



DIMENSIONS

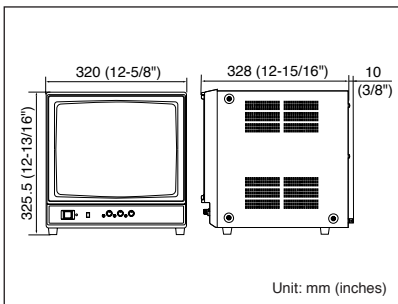

SPECIFICATIONS

Power Source	120 V AC, 60 Hz
Power Consumption	32 W
Actual Visual Size (Approx.)	32cm(12-11/16") diagonal
CRT Size (Approx.)	35cm(13-3/4") diagonal
19-type Rack-Mount	△Yes
Video Input	1
External Sync	Yes
Horizontal Resolution	1,000 lines at center
Sweep Linearity (over scan)	Less than 5 %
Sweep Geometry	Less than 2 %
Scanning	Switchable
Overscanning	6 %
Underscanning	5 %
DC Restoration (switchable)	Yes (No)
Ambient Operating Temperature	-10°C - +50°C (+14°F - +122°F)
Ambient Operating Humidity	Less than 90 %
Dimensions (W x H x D)	320 x 326 x 328 mm (12-5/8" x 12-13/16" x 12-15/16")
Weight	10 kg (22 lbs.)

△ : With optional rack angle bracket.

22cm(9") B/W Video Monitor WV-BM990




- Actual visual size: 22cm(9") diagonal.
- 800 lines resolution at center.
- Looping through BNC connectors for video input and output.
- Optional adaptor WV-Q29 for EIA 19-type rack(up to two monitors).

WV-Q29 (optional)



DIMENSIONS

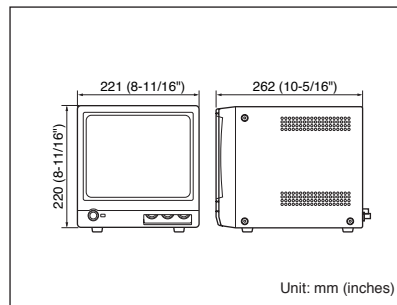

SPECIFICATIONS

Power Source	120 V AC, 60 Hz
Power Consumption	28 W
Actual Visual Size (Approx.)	22cm(9") diagonal
CRT Size (Approx.)	24.5cm (9-5/8") diagonal
19-type Rack-Mount	△Yes
Video Input	1
External Sync	No
Horizontal Resolution	800 lines at center
Sweep Linearity (over scan)	Less than 5 %
Sweep Geometry	Less than 2 %
Scanning	Fixed
Overscanning	6 %
Underscanning	No
DC Restoration (switchable)	Yes (No)
Ambient Operating Temperature	-10°C - +50°C (+14°F - +122°F)
Ambient Operating Humidity	Less than 90 %
Dimensions (W x H x D)	221 x 220 x 262 mm (8-11/16" x 8-11/16" x 10-5/16")
Weight	5.2 kg (11.5 lbs.)

△ : With optional rack angle bracket.

13cm(5") B/W Video Monitor WV-BM500




- Actual visual size: 13cm(5") diagonal
- 700 lines resolution at center.
- DC restoration.
- Standard BNC type connectors for independent video and sync inputs and outputs.

Three 13cm(5") B/W Video Monitors WV-BM503 (19-type rack mount)



DIMENSIONS (WV-BM500)

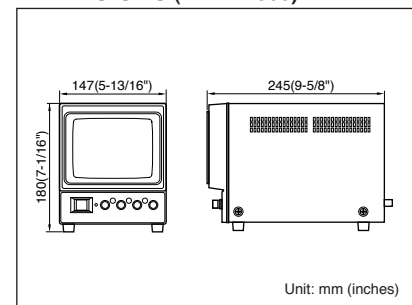

SPECIFICATIONS (WV-BM500)

Power Source	120 V AC, 60 Hz
Power Consumption	14 W
Actual Visual Size (Approx.)	13cm(5") diagonal
CRT Size (Approx.)	14cm (5-3/8") diagonal
19-type Rack-Mount	△Yes
Video Input	1
External Sync	Yes
Horizontal Resolution	700 lines at center
Sweep Linearity (over scan)	Less than 5 %
Sweep Geometry	Less than 2 %
Scanning	Fixed
Overscanning	5 %
Underscanning	No
DC Restoration (switchable)	Yes (Yes)
Ambient Operating Temperature	-10°C - +50°C (+14°F - +122°F)
Ambient Operating Humidity	Less than 90 %
Dimensions (W x H x D)	147 x 180 x 245 mm (5-13/16" x 7-1/16" x 9-5/8")
Weight	2.3 kg (5.1 lbs.)

△ : With optional rack angle bracket.